

RL-AFS202CLT-2

Urinal Sensor Flush Valve

PRODUCT FEATURES



- Touch-free flushing activation for optimum personal hygiene
- Anti-corrosion S/S grade 304 cover panel
- Easy installation and maintenance

PRODUCT SPECIFICATION

- Installation type : Concealed box, front accessible maintenance service
- Dimension (front panel) : 144 x 144mm
- Panel wall opening : 129 x 129mm
- Material (front plate) : Stainless steel 304
- Material (button) : Plastic, chrome plated
- Material (flush valve) : Brass
- Power input : 220 – 240V AC @ 50/60Hz
- Sensing distance : 600mm
- Detection time : 6 seconds
- Operating water pressure : 1 – 3 bars (dynamic)
- Discharge volume (adjustable) : Nominal 0.5 -1.5 litres/ flush



TECHNICAL DRAWING

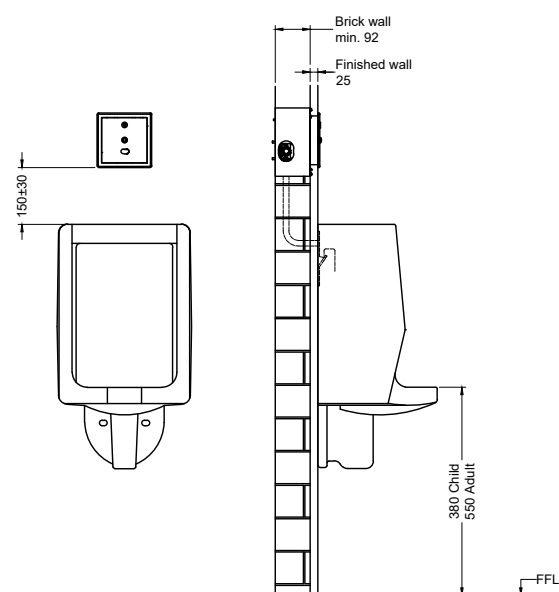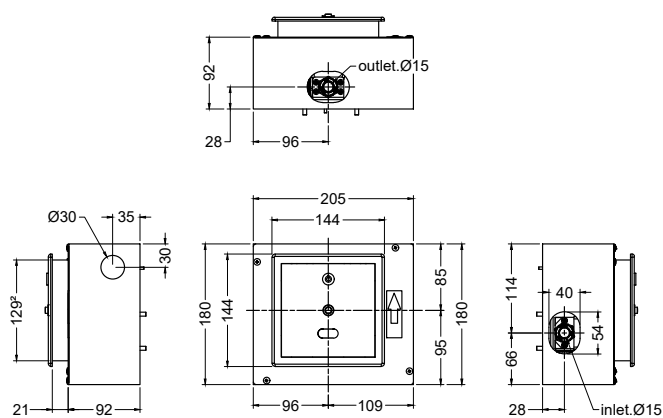

*Note:

- 150±30 From bottom edge panel to urinal bowl top surface

() Denotes recommended value
All dimension are in mm