### **WC Manual Flush Valve**

### **Product Features**

- Dual flush operation
- Anti-corrosion & anti-rust S/S grade 304 cover panel
- Enlarged button for easy pressing
- Easy installation and maintenance

# **Product Specification**

Installation type : Concealed box,

front accessible maintenance service

Dimension (front panel) : 180 x 180mm Panel wall opening : 169 x 169mm Material (front panel & frame) : Stainless steel 304 Material (button) : Stainless steel 304 Material (flush valve) : Brass casting

Operating water pressure : 1.5 -3 bars (dynamic)

Discharge volume (default) : Nominal 4.5 litres/ flush (full)


: Nominal 3.0 litres/ flush (reduced)


Discharge volume (configurable) : 3.5 - 6.0 litres/ flush (full)

: 2.5 - 3.0 litres/ flush (reduced)



# **Technical Drawing**

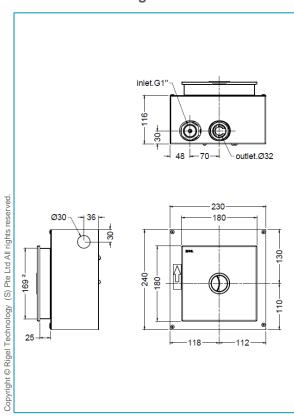



- 490-510 From bottom edge panel to water closet rim
- 700±30 From bottom edge panel to squat pan rim
- Dimension may vary when WC bowl matches with manual / electronic bidet seat & cover

()Denotes recommended value All dimension are in mm

Rev	2.0
Date	15.01.2021

DISCLAIMER: While every effort has been made to ensure factual accuracy, the information presented is subject to changes due to requirements in different sites, markets and / or countries. Rigel reserves the right to make the necessary amendments at any time without prior notice