RL-ST103D



Deck Mounted Sensor Tap, AC Operated

PRODUCT FEATURES

- · Automatic infrared sensor activation faucet
- · Fully automatic sensor activation for personal hygiene
- Electrical sensor is isolated and sealed in waterproof compartment
- Self adjusting signal frequency to prevent interference with other sensor products

PRODUCT SPECIFICATIONS

Dimension : 180 (L) x Ø60 (W) x 157 (H) mm
Material : Polished brass with chrome finish

• Power Supply : 230VAC 50Hz

Detection Range : Self-adjusting to environment

Operating Temperature : 0 - 40°C

Supply Pressure : 70 kPa (flowing) – 700 kPa

Water Consumption : 10 secs. Faucet: 0.35 litre per cycle
Saving Feature : Auto cut-off when hands are removed

Detection Time : ON feature: Immediate

OFF feature: 0.5 secs. delay

WATER CONSUMPTION

WELS Rating : Excellent
Water Flow Rate : 2.0L/minute
Water Saving : 66%

* Pending for WELS certification





RESOURCEFUL FEATURES:













Touch-Free

TECHNICAL DRAWING

INSTALLATION DETAILS



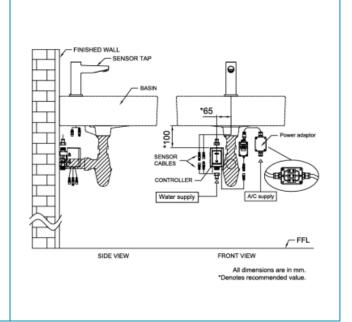



Copyright @ Rigel Technology (S) Pte Ltd All rights reserved. Terms of Use

DISCLAIMER: While every effort has been made to ensure factual accuracy, the information presented is subject to changes due to requirements in different sites, markets and/or countries. Rigel reserves the right to make the necessary amendments at any time without prior notice.