

Water Closet Sensor Flush Valve

Product Features


- Touch-free flushing activation for optimum personal hygiene
- Water-saving dual flush operation
- Manual overriding button in case of power outage
- Anti-corrosion & anti-rust S/S grade 304 cover panel

Product Specification

- Installation type : Concealed box, front accessible maintenance service
- Dimension (front panel) : 180 x 180mm
- Panel wall opening : 169 x 169mm
- Material (front panel & frame) : Stainless steel 304
- Material (button) : Stainless steel 304
- Material (flush valve) : Brass casting
- Power input : 220 – 240Vac 50/60Hz
- Sensing distance : 900mm (default)
- Detection time : 6 seconds
- Manual override : Push button
- Operating water pressure : 1.5 -3 bars (dynamic)
- Discharge volume (default) : Nominal 4.5 litres/ flush (full)
Nominal 3.0 litres/ flush (reduced)
- Discharge volume (configurable) : 4.0 – 5.0 litres/ flush (full)
≤3.0 litres/ flush (reduced)



Technical Drawing

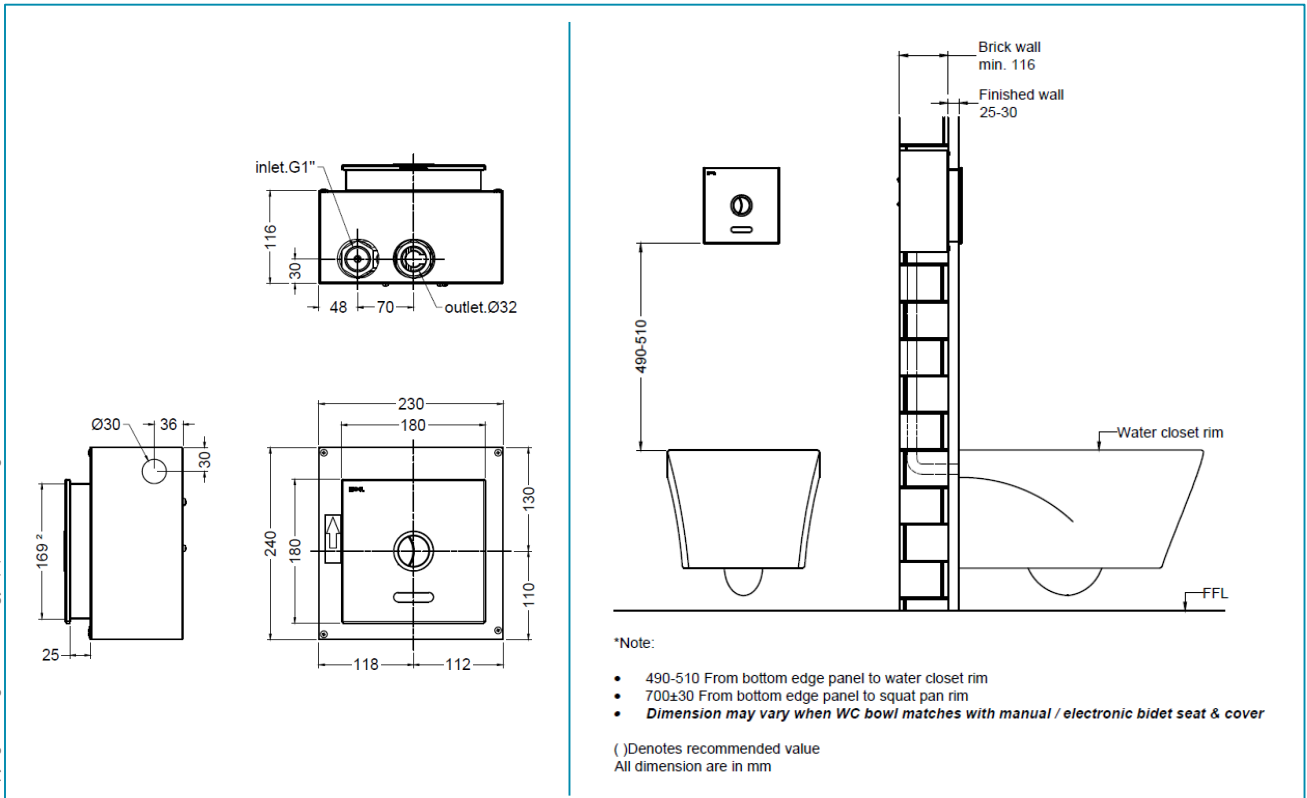

Copyright © Rigel Technology (S) Pte Ltd All rights reserved.

Rev	4.0
Date	12.03.2021

DISCLAIMER : While every effort has been made to ensure factual accuracy, the information presented is subject to changes due to requirements in different sites, markets and / or countries. Rigel reserves the right to make the necessary amendments at any time without prior notice.